


WIDTH	LENGTH	HEIGHT (PERMS)	TOTAL STAGE Square footage	FLOOR TYPE	DOOR (WxH)
127'	127'	35'	15,761	WOOD OVER SLAB	16' X 16'2''

*Dimensions are for overall stage size and do not take into account stage irregularities. Production company representative should verify dimensions for particular applications.

STAGE SPECIFICATION - STAGE 5

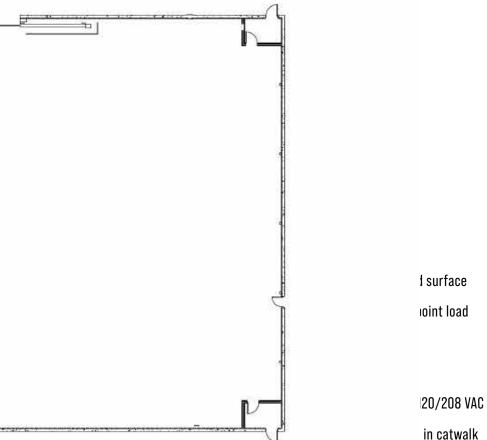

HVAC

HVAC - Fully Self Contained (100 ton cooling capacity) package unites located on the roof with isolators and seismic restraints Acoustic Rating - NC 25 **Redlight Control - Yes** Ventilation - Yes Heating - Yes

l surface

STAGE EXTRAS

Hose Bib - One hose bib

Gas - No

Compressed Air - No

*Dimensions are for overall stage size and do not take into account stage irregularities. Production company representative should verify dimensions for particular applications.